


# Distributors and Relays

# 10

Relays

320

# UAR Relays for Fire Detection Systems

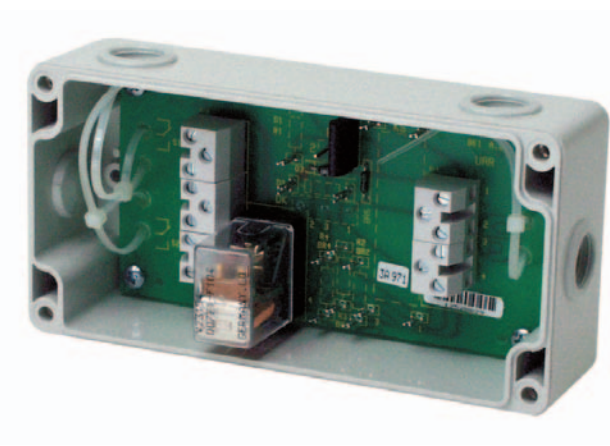

The Universal Connection Relay (UAR) is controlled by a security system and handles the triggering of additional equipment on monitored control lines.

The UAR can be, depending on the connection to the security system, equipped with a 12 V relay or a 24 V relay.

## Technical Specifications

Operating voltage	10.5 V DC ... 29 V DC
Permissible switching current	Max. 3 A
Switching voltage	60 V AC/DC
Switching power with AC current load	180 VA
Permissible ambient temperature	-25 °C ... +60 °C
Protection class as per EN 60529	IP 54
Housing color	Gray
Dimensions (W x H x D)	160 x 80 x 55 mm
Weight	Approx. 300 g

## Ordering Information

<b>UAR/12 V Universal Connection Relay</b>	<b>FMX-UAR12-compl</b>
Both parts (housing and relay) are needed.	
<b>UAR/24 V Universal Connection Relay</b>	<b>FMX-UAR24-compl</b>
Both parts (housing and relay) are needed.	

## Certifications and Approvals

Region	Certification	
Europe	CE	UAR 12V/24V
Germany	VdS	G 178046 UAR
Russia	GOST	POCC DE.C313B06300

## Parts Included

### UAR/12 V Universal Connection Relay

Qty.	Components
1	Relay housing with PC board and relay base
1	Relay 12 V
1	Bag with connection accessories

### UAR/24 V Universal Connection Relay

Qty.	Components
1	Relay housing with PC board and relay base
1	Relay 24 V
1	Bag with connection accessories